
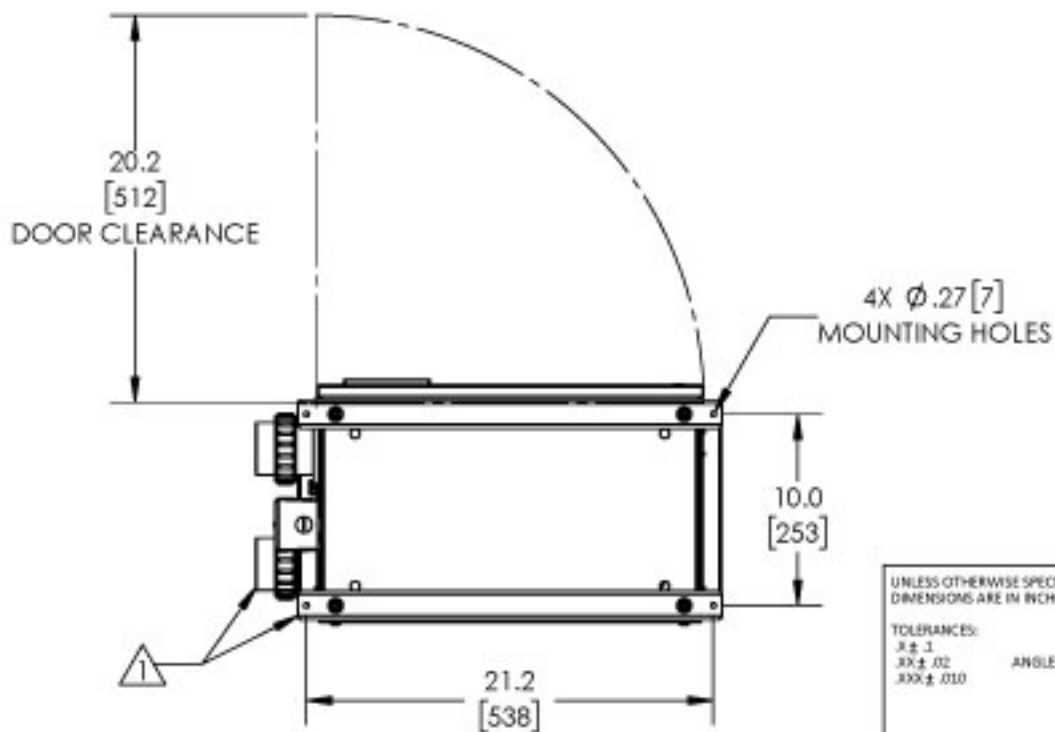
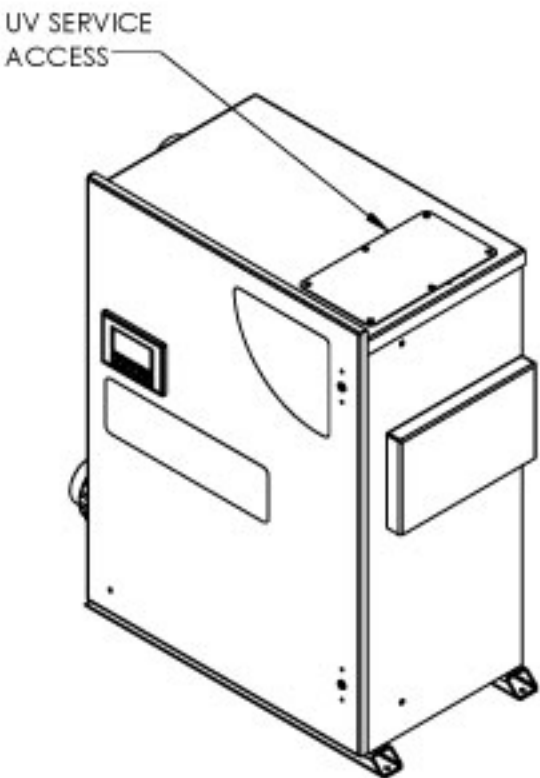


REVISIONS			
REV.	DESCRIPTION	ECN #	DATE
A	INITIAL RELEASE	NP0105	5/26/2021

SPECIFICATIONS	
MODEL	UVC-PRO-50DXX-XX
POWER	120 V / 1.6 A / 60 Hz
ENCLOSURE RATING	NEMA 12
AMBIENT OPERATING TEMP.	40 - 110 °F (5 - 43 °C)
OPERATING FLOW RANGE	20 - 50 GPM
MAXIMUM OPERATING PRESSURE	50 PSI
MAXIMUM WATER TEMP.	102 °F (39 °C)
APPROVALS	UL, NSF

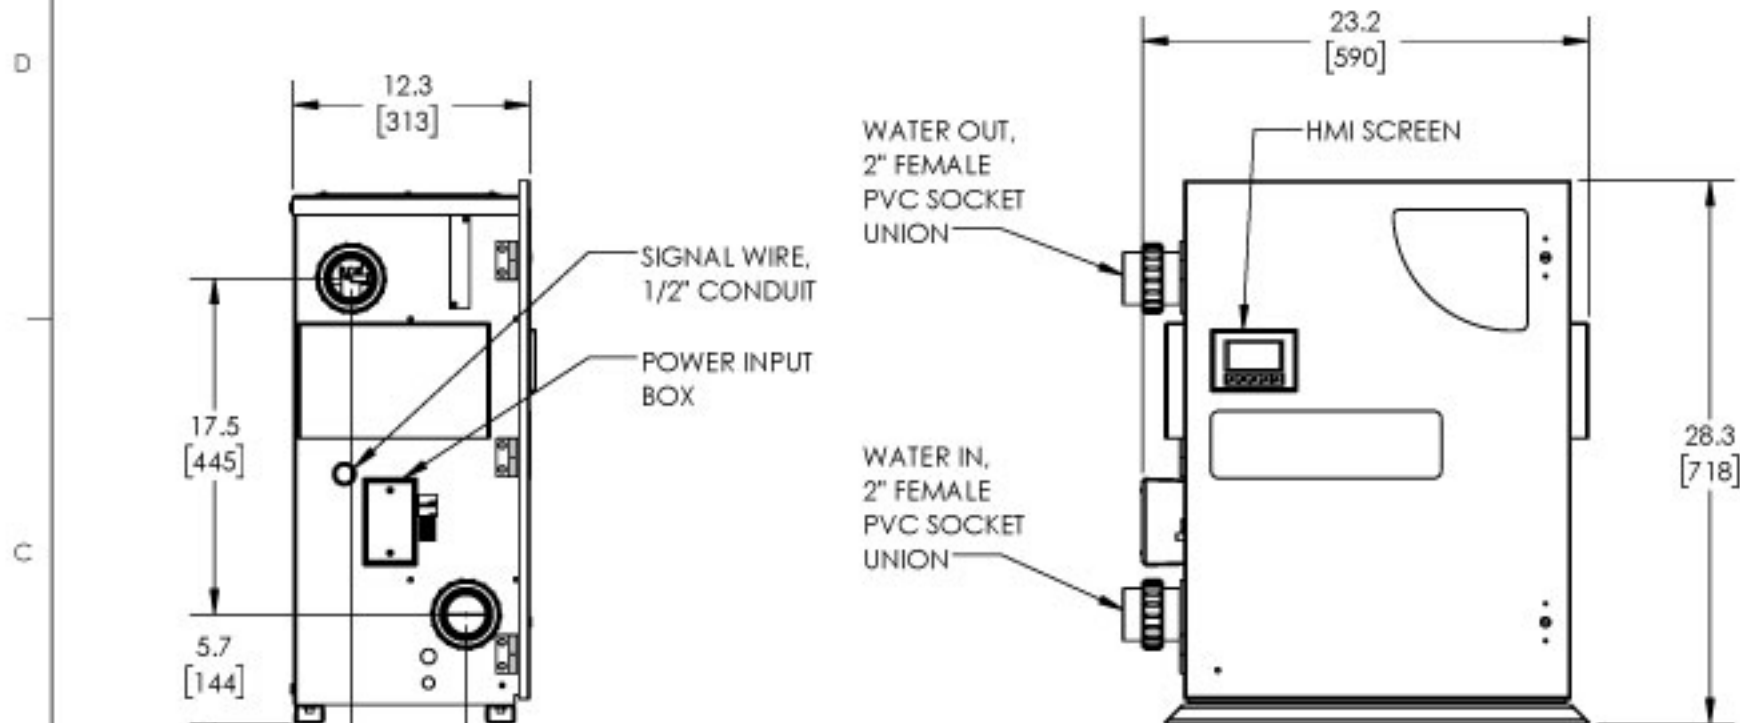

NOTES: UNLESS OTHERWISE SPECIFIED

① 2" FEMALE PVC SOCKET UNIONS AND FLOOR/WALL MOUNTING BRACKETS INCLUDED IN PARTS KIT.

2. UVC-PRO-50D-01 MODEL SHOWN.

**PROPRIETARY AND CONFIDENTIAL**

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF CUSTOM MOLDED PRODUCTS. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF CUSTOM MOLDED PRODUCTS IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED  
DIMENSIONS ARE IN INCHES (mm)

TOLERANCES:  
X ± .1  
XX ± .02  
XXX ± .010

ANGLES: ± 1°

MATERIAL  
NA  
FINISH  
NA



DRAWING STATE:

PROJECT/ECN #:

ENGINEERING DESIGN

DATE

T.M.C.N.E.R.

5/26/2021

ENGINEERING APPROVAL

CAD-GENERATED DRAWINGS  
DO NOT MANUALLY UPDATE

**CMP**

TITLE: SPECIFICATION,DWG,  
UVC-PRO-50DXX-XX

PART NO.

4-2696-02

REV  
A

SCALE: 1:10  
DO NOT SCALE DRAWING

WEIGHT:

SHEET 1 OF 1