
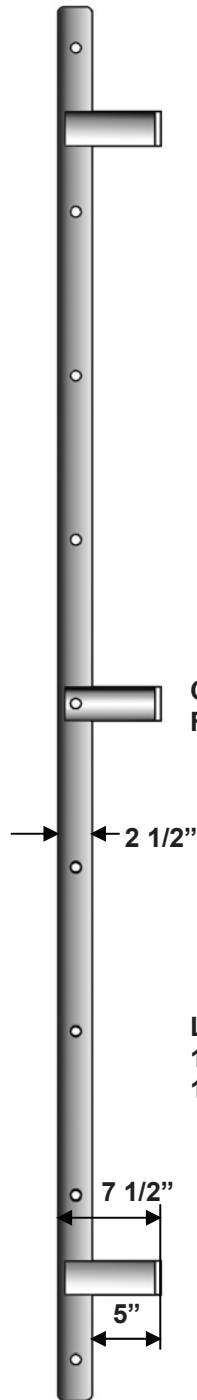


SURGE TANK

Stainless Steel Access Ladders

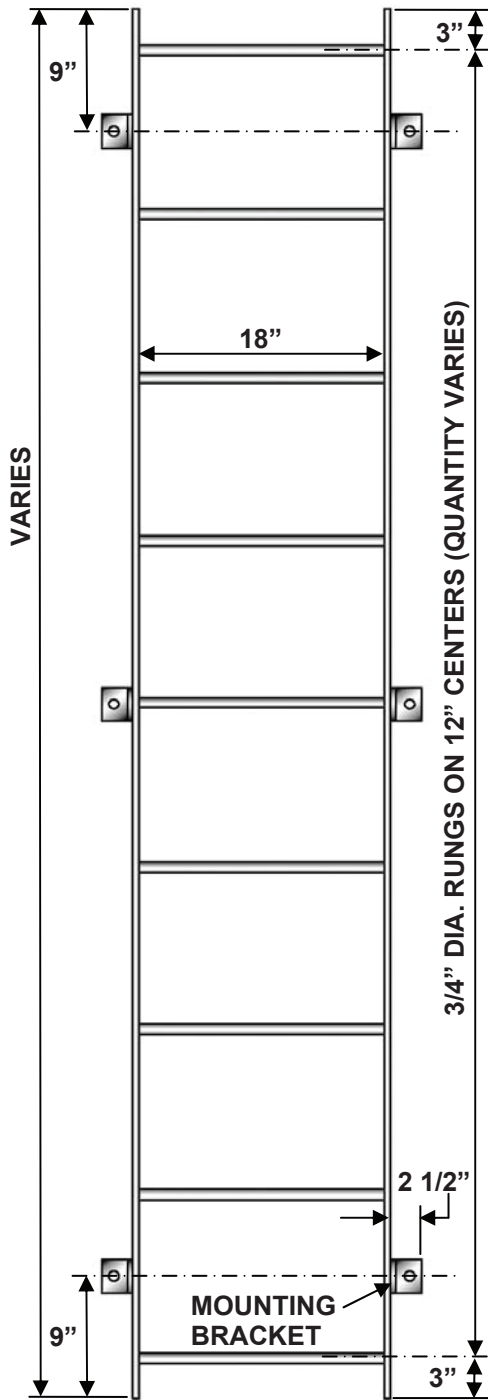

CENTER MOUNTING BRACKETS FOR LADDERS OVER 78" LONG

LADDER RAILS AND BRACKETS ARE 1/4" THICK
 1/2" S.S. MOUNTING HARDWARE NOT INCLUDED
 1/2" S.S. MOUNTING HARDWARE NOT INCLUDED



Description	Part Numbers
LADDER SURGE TANK 2 RUNG	160SSTL02R
LADDER SURGE TANK 3 RUNG	160SSTL03R
LADDER SURGE TANK 4 RUNG	160SSTL04R
LADDER SURGE TANK 5 RUNG	160SSTL05R
LADDER SURGE TANK 6 RUNG	160SSTL06R
LADDER SURGE TANK 7 RUNG	160SSTL07R
LADDER SURGE TANK 8 RUNG	160SSTL08R
LADDER SURGE TANK 9 RUNG	160SSTL09R
LADDER SURGE TANK 10 RUNG	160SSTL10R
LADDER SURGE TANK 11 RUNG	160SSTL11R
LADDER SURGE TANK 12 RUNG	160SSTL12R
LADDER SURGE TANK 13 RUNG	160SSTL13R
LADDER SURGE TANK 14 RUNG	160SSTL14R

1000-6617 2'6OL F/<4'6DP
 1000-6618 4'6OL F/<6'6DP
 1000-6619 5'6OL F/<7'6DP
 1000-6620 7'6OL F/<9'6DP
 1000-6621 8'6OL F/<10'6DP
 1000-6622 9'6OL F/<11'6DP
 1000-6623 12'6OL F/<14'6DP
 1000-6621 13'6OL F/<15'6DP

R-5/10/11

SURGE TANK ACCESS LADDER

- A. Access ladder shall be a Neptune-Benson stainless steel ladder and shall be mounted inside the surge tank. Ladder shall be 18" wide with 2½" x 1/4" side rails. Length per plan.
- B. Ladder rungs shall be ¾", diameter stainless steel rod spaced at 12" centers. 2½" x 1/4", stainless steel, angle clips shall be provided for mounting ladder to surge tank wall.