BERKELEY® TYPE B CLOSE-COUPLED MOTOR DRIVEN CENTRIFUGAL PUMPS

BERKELEY CLOSE-COUPLED ENDSUCTION PUMPS are ideal for most applications requiring high performance, easy maintenance and moderate initial cost. Cast iron construction with unique back pull-out design permits access to the impeller without disturbing the piping.

Features / Benefits

Four-position Discharge

Rotatable discharge can be positioned for fast, easy piping. Small models equipped with tapped suction and discharge; large models have standard ANSI 125# flat-face flange.

Premium-grade Motors

NEMA grade motors for greater efficiency, reliability and longevity. Quiet, smooth operation.

Motor Bracket

Precision-machined, closed-grain cast iron provides added strength to minimize deflection and ensure a tight component seal.

Maintenance-free Shaft Seal

Self-lubricating, corrosion-resistant mechanical shaft seal provides maximum abrasion resistance without leaking. Optional seals available for special applications.

Replaceable Slip-on Shaft Sleeve

Rugged stainless steel shaft sleeve provides maximum corrosion and wear resistance.

Replaceable Bronze Wear Ring

Available on some models.

Superior Impeller

Precision-machined to optimize performance and operating efficiencies. Mechanically balanced to reduce bearing load for longer service life. Keyed and locked to motor shaft.

▶ Heavy-duty Volute Case

Thick-wall, close-grained cast iron stands tough in high-demand environment. Hydraulic efficiency is improved with CAD-based geometric design. Back pull-out design permits easy removal and repair without disturbing piping.

Multiple Taps

Taps included for easy priming and draining.

Durable Finish

High-quality lead-free/chromatefree primer and paint coatings.






BERKELEY® TYPE B CLOSE-COUPLED MOTOR DRIVEN CENTRIFUGAL PUMPS

Materials of Construction

Part Name	Material	Spec Number
Volute Case	Cast Iron	ASTM A48 Class 30
Wear Ring	Bronze	ASTM B584 (UNS C87500)
Impeller	Cast Iron	ASTM A48 Class 30
	Bronze (optional)	ASTM B854 (UNS C87500)
Seal Retainer	Cast Iron	ASTM A48 Class 30
Adaptor Bracket	Cast Iron	ASTM A48 Class 30
Shaft Sleeve	416 S.S.	AISI 416SS
Lantern Ring	Teflon [®]	
Mechanical Shaft Seal	18-8 S.S. metal parts; "Buna-N" rubber bellows, ceramic stationary, carbon rotating face	
Packing Gland	Stainless Steel	AISI 304
	Cast Iron	ASTM A48 Class 30
Packing	PTFE packing with graphite impregnation	
Close Coupled Motor Shaft	Carbon Steel	AISI C1045

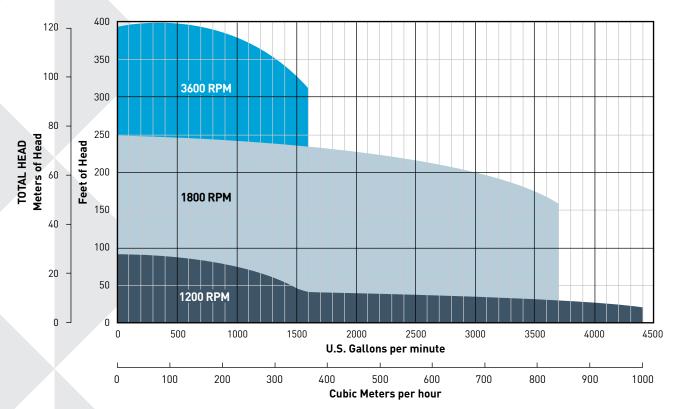



293 WRIGHT STREET, DELAVAN, WI 53115 WWW.BERKELEYPUMPS.COM PH: 888-237-5353 ORDERS FAX: 800-321-8793

BERKELEY® and Pentair are registered trademarks of Pentair Ltd. TEFLON® is a registered trademark of E.I. du Pont de Nemours and Company. Because we are continuously improving our products and services, Pentair reserves the right to change specifications without prior notice.

© 2012 Pentair Ltd. All Rights Reserved. B2222BK (11/20/12)