

**Raypak**<sup>®</sup>  
A Rheem<sup>®</sup> Company

Visit our website  
to learn more



Take the **PLUNGE** with

**CROSS**  
**WIND** **V**<sup>®</sup>

**HEAT & CHILL MODELS**



**ONE SYSTEM,  
YEAR-ROUND COMFORT.**

HEAT OR CHILL YOUR POOL EFFORTLESSLY.



**AUTO**

Set the desired temp to heat or chill to the perfect swim temperature.



**CHILL**

Chill your pool down 10 to 15 degrees in 24-hours to beat those hot summer days.



**PLUNGE**

Set Crosswind V as low as 44°F, perfect for typical 50° to 60°F cold plunges.\*

\*Typical cold plunge size of 500-1000 Gal.

Check out the full brochure to learn more




# CHILL, HEAT, AND AUTOMATE THE PERFECT SWIM EXPERIENCE.

## WHAT ELSE COULD YOU ASK FOR?

Crosswind V delivers the best return on your investment by incorporating innovative, energy-efficient, and long-lasting design.

- Sleek, modern design
- Whisper quiet operation
- Solar thermal system control
- Hybrid heating control
- Control from anywhere with Raymote®

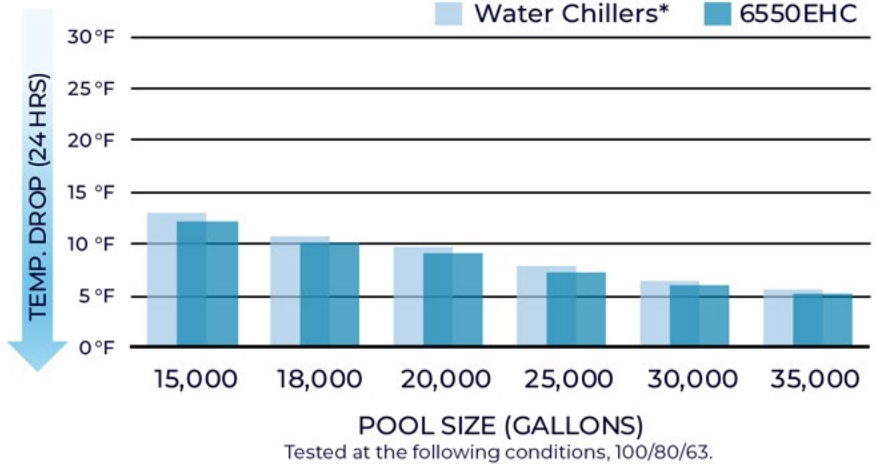

## CONTROL UP TO 6 DEVICES

### ADVANCED AUTOMATION OUT OF THE BOX

Upgrade your backyard oasis at a fraction of the cost with built-in free automation controls. Easily control and automate up to six different devices:

- Actuator 1
- Actuator 2
- VS Pump Control\*\*
- Single-Speed Pump
- Auxiliary 1
- Auxiliary 2

Model	Elec. Input (kW)	Min. Amps	Recommended Breaker*** (Amps)	Unit Weight (lbs)	Shipping Weight (lbs)
TWPH-6550EHC08	5.4	46	60	292	310
TWPH-8550EHC08	6.7	46	60	340	358



[raypak.com/pool](http://raypak.com/pool)

2151 Eastman Avenue | Oxnard, CA 93030 | 805-278-5300

\* Compared to AquaCal® TropiCool® water chiller model TC1000.

\*\* Drives most popular variable-speed (VS) pumps in the market.

\*\*\* Recommended breaker size based in nominal electrical conditions and standard unit operation. Consult I/O manual for MCA and MOCP values.

Litho in U.S.A. ©2025 Raypak Inc.

RP-P-620-4 REV A Effective 3-12-25 | Replaces NEW