



The best commercial electric pool and spa heating solution.

61 MBTUH - 184 MBTUH

18 - 54kW



Applicable for heating in multi-family housing, schools, hotels, aquatic centers, and more.

Reliable Performance

- Durable design that stands up to the elements and operates under tough conditions
- Durable against salt pool water conditions, standard on all models
- Titanium heating elements for better quality and longer perfomance

Best-In-Class Controls

- 80-character display; more operational and diagnostic data at a glance
- Easy to understand codes; no blinking lights or abreiviated fault codes

Optimal Performance

 $\bigcirc \ominus \oplus \bigcirc$


- Flow Protection; prevents the unit from dry firing (15-60 GPM)
- Low-Temp Operating Mode; prevents the unit from damage due to sharp drops in system water temperature
- Load Detection; prevents the unit from unwanted heating when there is no "Call for Heat"
- Patent pending 50/50 Mode*; operates at 50% capacity to help prevent downtime and reduce energy costs

Installation & Servicability

• Easy to install and service; built with the facility manager and servicer in mind



E3T 3-PHASE - TYPE P MODELS 18KW - 54KW

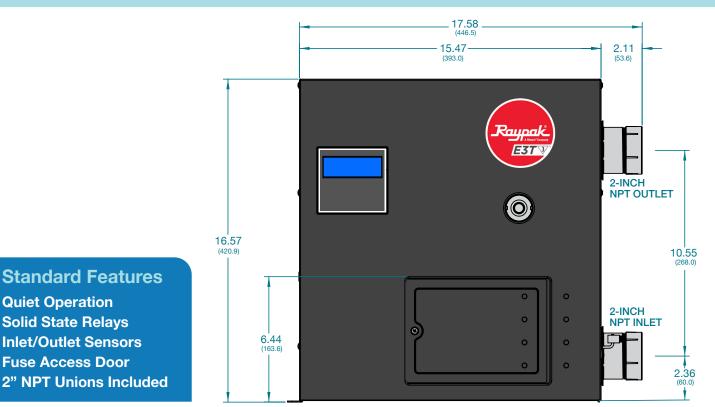

DIMENSIONS IN INCHES (MM)

Model	Part Number	BTUH	Power	Voltage	Cabinet Depth in. (mm)	Unit Weight Ibs. (kg)	Shipping Weight Ibs. (kg)
ELS-R-0018-3-TI	019141	61,419	18 kW	208V	5.5 (139.7)	33.5 (15.2)	41.9 (19.0)
ELS-R-0018-4-TI	019142	61,419	18 kW	480V	5.5 (139.7)	33 (15.0)	41.4 (18.8)
ELS-R-0024-3-TI	019143	81,891	24 kW	208V	5.5 (139.7)	33.5 (15.2)	41.9 (19.0)
ELS-R-0024-4-TI	019144	81,891	24 kW	480V	5.5 (139.7)	33 (15)	41.4 (18.8)
ELS-R-0030-3-TI	019145	102,364	30 kW	208V	8 (203.2)	50 (22.7)	59.5 (27.0)
ELS-R-0030-4-TI	019146	102,364	30 kW	480V	8 (203.2)	47.7 (21.6)	57.2 (26.0)
ELS-R-0045-4-TI	019147	153,546	45 kW	480V	8 (203.2)	49.2 (22.3)	58.7 (26.6)
ELS-R-0054-4-TI	019148	184,255	54 kW	480V	8 (203.2)	49.2 (22.3)	58.7 (26.6)



Learn more about E3T 3-Phase commercial pool heaters at Raypak.com