

Stanchion Post

The stanchion post shall be fabricated of 1.90" O.D. 300 series stainless steel. It shall be either 8'-0" or 4'-6" in length and have a 2" ring M.I.G. welded to its top surface.

Anchor

The stanchion post shall be supported by one (1) 6" 300 series stainless steel slip-type anchor or other appropriate stanchion anchor.


Sliding Collar

Optional 300 series stainless steel sliding collar may be supplied with stanchion post. The sliding collar shall have a 2" ring M.I.G. welded to its outer surface and be supplied with a thumb screw for easy adjustment.

Warranty

Spectrum standard warranty.

PART NUMBER	HEIGHT	MATERIAL
23612	8'-0"	1.9" X .109" 304L
23614	8'-0"	1.9" X .145" 304L
23622	4'-6"	1.9" X .109" 304L
23624	4'-6"	1.9" X .145" 304L
134043-96-.109	8'-0"	1.9" X .109" 316L
134043-96-.145	8'-0"	1.9" X .145" 316L
134043-54-.109	4'-6"	1.9" X .109" 316L
134043-54-.145	4'-6"	1.9" X .145" 316L

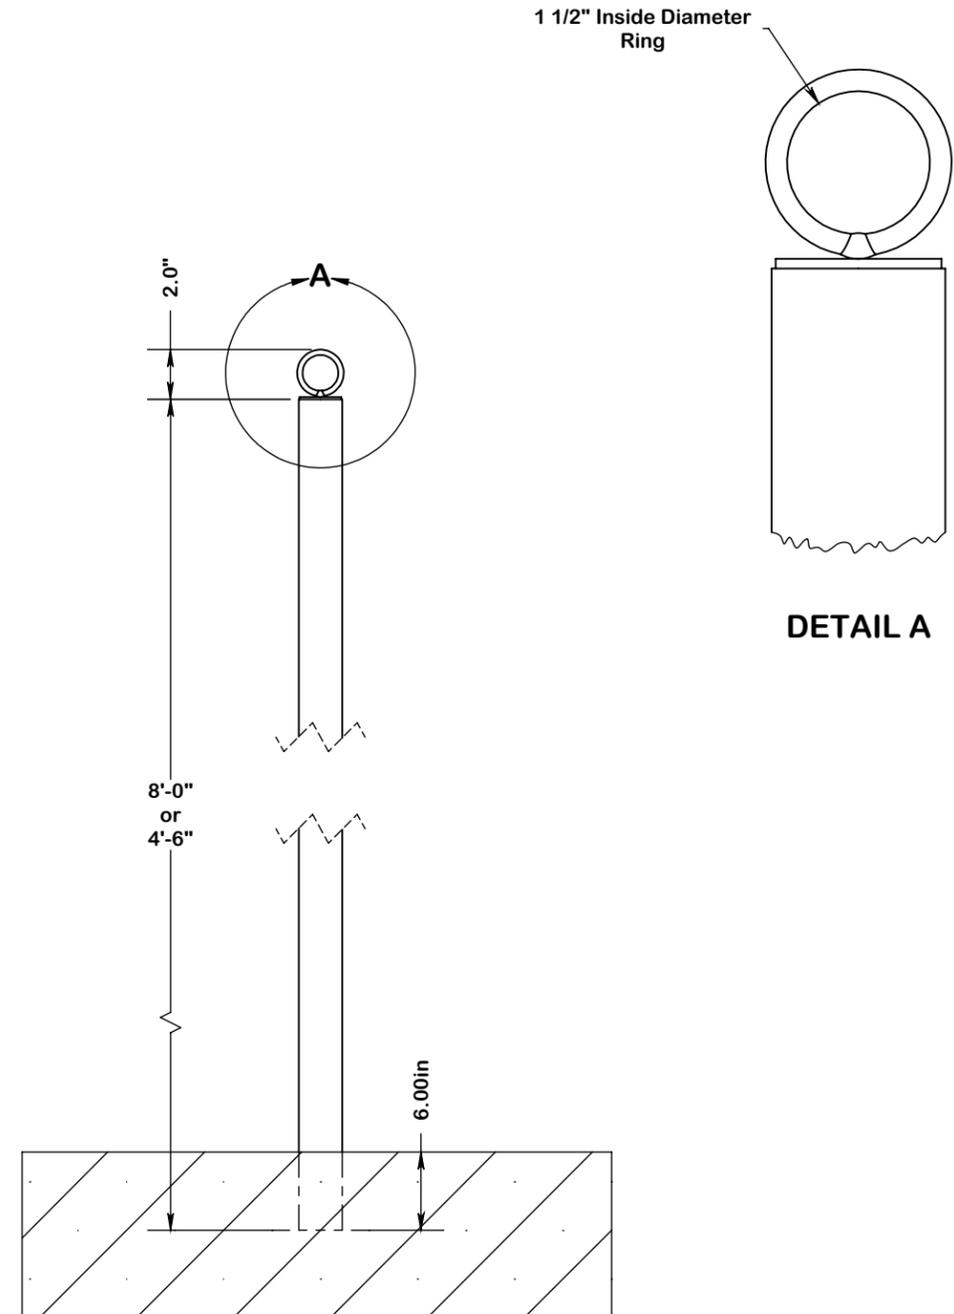

SPECTRUM
Aquatics

A PLAYCORE Company

7100 Spectrum Lane
800.791.8056

Missoula, Montana 59808
www.spectrumaquatics.com

ENGINEERING DATA

PRODUCT:	STANCHION POST			
MODEL #:	SEE TABLE	CATALOG #:		REVISION: A
MATERIAL:	SEE TABLE			
FINISH #:	PASSIVATE IAW ASTM A967			

NOTE:
 ⚠ DIMENSIONS VARY WITH SPECIFIC APPLICATIONS. SPECIFICATIONS ARE NOMINAL AND ARE SUBJECT TO CHANGE. PLEASE CONTACT SPECTRUM AQUATICS FOR CUSTOM APPLICATIONS