

ColorSplash LXG-W

Color Changing LED Replacement Pool & Spa Lamps

- Replaces Existing Incandescent Pool Lamps
- Long Life Energy Efficient LED Technology
- Compatible With All Major Manufactures Incandescent Light fixtures
- Fixture Lens Gasket Included*

Specifications

Description

J&J Electronics ColorSplash LXG-W Series In-Ground Pool and Spa Lamps offers the advantage of our PureWhite LED lighting in addition to LED color changing. With a variety of solid colors and color changing lights shows, instantly transform any pool or spa into a custom illuminated paradise. These LED Pool and Spa Replacement Lamps install in minutes and offer the ideal ambiance for playing, relaxing or entertaining, while providing immediate energy cost savings over traditional incandescent pool lamps. Each lamp includes our Guardian™ replacement pool fixture lens gasket* which has been designed specifically for use with LED lamps.

Construction

- High output LEDs
- Proprietary thermal management
- Compact lamp design
- Screw in edison base
- Zero pixelation lens
- Wide angle LEDs
- Designed exclusively for swimming pool lights

Certifications



LPL-P3 Series

LPL-S3 Series



Features

- High output red, green, blue and white LED's
- Uniformity of light intensity and saturation
- 3-in-1 control is Compatible with Pentair®, Hayward® and Jandy® Automation systems.
- Works with J&J Electronics XG Controller**
- Zero pixelation Lens
- Wide beam spread
- Edison base - Compatible with most manufactures fixtures
- 40,000 + hour life span

Controls

- J&J Electronics XG Controller**
- Most pool automation systems
- Simple on/off power switching

* Fixture Lens Gasket included for use with Pentair® Amerlite™ or Pentair® SpaBrite™ pool light fixtures. Order lens gaskets for other manufactures pool light fixtures separately.
 ** XG Controller will operate the J&J Electronics light shows only. (Five solid colors and seven light shows)

Color Changing LED Replacement Pool & Spa Lamps

Ordering Information

Product SKU	Product Code	Product Description
26910	LPL-P3-RGBW-120	120V COLORSPLASH LED POOL LAMP, RGBW
26911	LPL-P3-RGBW-12	12V COLORSPLASH LED POOL LAMP, RGBW
26912	LPL-S3-RGBW-120	120V COLORSPLASH LED SPA LAMP, RGBW
26913	LPL-S3-RGBW-12	12V COLORSPLASH LED SPA LAMP, RGBW

Specification Table

Product Code	Voltage (AC)	Input Power (max.)	Color Temperature	Lumens R	Lumens G	Lumens B	Lumens W	Use	Water Temp. Range	Fixture compatibility
LPL-P3-RGBW-120	120V	32W	RGB+6500K	392	662	251	1484	Pool or Spa	33°F to 104°F	J&J Electronics TPL-P Series; Hayward® Astrolite™ SP058 Series; Jacuzzi® Full Moon™; Jandy® Pro Series White Pentair® Amerlite™ 784 Series; Sta-Rite® Swim Quip™
LPL-P3-RGBW-12	12V	32W	RGB+6500K	489	533	242	1533	Pool or Spa	33°F to 104°F	
LPL-S3-RGBW-120	120V	9W	RGB+6500K	79	136	73	366	Pool or Spa	33°F to 104°F	J&J Electronics TPL-S Series; Hayward® Astrolite™ SP059 Series; Pentair SpaBrite™ Series; Jandy® Pro Series White
LPL-S3-RGBW-12	12V	9W	RGB+6500K	97	139	78	409	Pool or Spa	33°F to 104°F	

Dimensions

LPL-P3 Series



5.35"

5.25"

LPL-S3 Series




3.30"


2.94"

J&J Electronics Factory Default Light Programs

Seven Light Shows

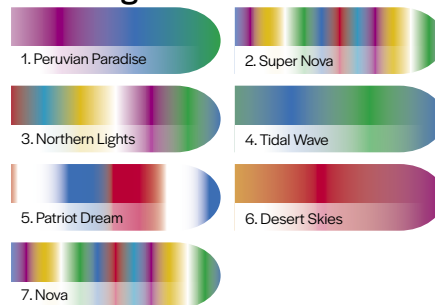

Five Solid Colors

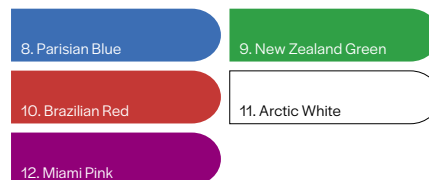

Color Changing Instructions (when controlled with a on/off switch)

Power Cycle:

The action of turning the light fixture power switch off/on.

Change Light Show/Solid Color:

Power cycle the corresponding number of times shown next to the light show/solid colors.

Color Lock (Lock on color while in light show):

Power cycle thirteen (13) times.

Return (Return to last saved Color Lock):

Power cycle fourteen (14) times.

Reset/Synchronize:

Power cycle the corresponding number of times shown next to the light show/solid colors.

Note: During power cycle selection process, before the desired light show or color is displayed, there will be a moment without illumination. This is a normal function.

See Installation and Operation Guide for additional information regarding J&J's 3-in-1 control