

HAIR AND LINT TRAPS FOR COMMERCIAL PUMPS



Pkg. 184/184C (9 1/2")



Pkg. 51/56 (6")



Pkg. 98/99 (8")



Pkg. 76 (11")

PROVEN PERFORMANCE UNDER DEMANDING CONDITIONS

Rugged hair and lint traps from Pentair Commercial Aquatics™ are forged from cast iron or red brass for heavy-duty commercial service. 6" suction and discharge accommodates high-flow performance in a variety of applications*. ANSI rated flange bolt pattern permits faster plumbing and installation.

Standard Features

- Bronze or cast iron
- 6", 8" or 9 1/2" trap diameters

**Model 184/184C only.*

ENGINEERING SPECIFICATIONS

- The pump strainer shall consist of a _____ (red brass/cast iron) body, cover with O-ring seal, threaded locking handles and a strainer basket of _____ (ABS/perforated electro-polished stainless steel basket) material.
- The strainer body shall have _____ NPT threaded connections and mount directly to the pump body by means of a bolt, flange and gasket seal, or 6" ANSI Rated 125 lb. bolt flanged with fusion-bonded epoxy coating on all wetted cast iron surfaces unless specified for in-line mounting ahead of the pump. The strainer body shall have a removable drain plug for winterizing.
- The strainer basket shall be securely positioned below the suction inlet of the trap, with access for inspection and cleaning through a removable trap body lid. The trap body lid shall be secured by means of threaded locking handles. The strainer basket shall have perforations which, in total area, are equal to 6 times the open area of the suction pipe into the trap body inlet.
- The pump strainer shall be Sta-Rite® Model No. _____ .


HAIR AND LINT TRAPS FOR COMMERCIAL PUMPS

Ordering Information

Catalog Number	Description	Basket Material	Suction Port Size	Approx. Ship Weight (lbs.)
PKG51	6" Dia. Cast Iron Trap with Basket	ABS	2" NPT	20
PKG56	6" Dia. Bronze Trap with Basket	ABS	2" NPT	20
PKG98	8" Dia. Cast Iron Trap with Basket	Stainless	3" NPT	40
PKG99	8" Dia. Bronze Trap with Basket	Stainless	3" NPT	40
PKG76	Cast Iron Flange for a Remote Installation of 8" Trap	-	3" NPT	4
PKG184	9 1/2" Dia. Cast Iron 1100 cu. in. Hair & Lint Strainer	Stainless	6" ANSI Rated Flange	180
PKG184C*	9 1/2" Dia. Cast Iron 1100 cu. in. Hair & Lint Strainer (coated)	Stainless	6" ANSI Rated Flange	180

*PKG184C features an epoxy-coated casting for corrosion resistance

Hair and Lint Trap Dimensions¹

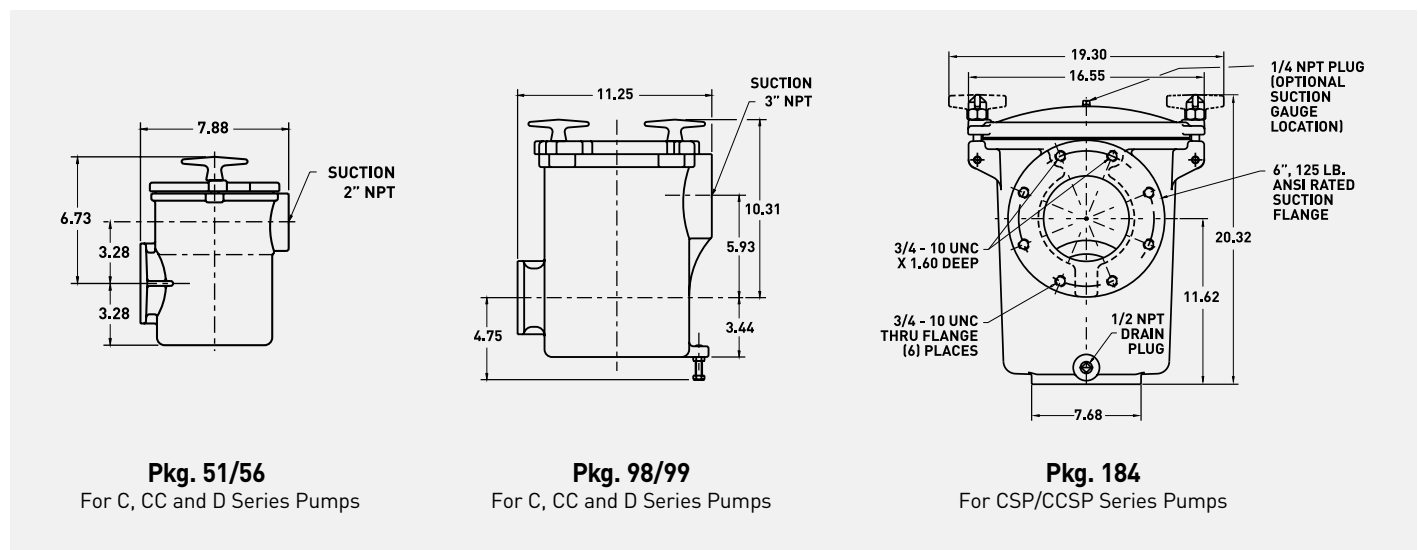

¹All dimensions shown in inches



1620 HAWKINS AVE, SANFORD, NC 27330 800.831.7133 WWW.PENTAIRCOMMERCIAL.COM

All Pentair trademarks and logos are owned by Pentair or one of its global affiliates. Sta-Rite® and Pentair Commercial Aquatics™ are registered trademarks of Pentair Water Pool and Spa, Inc. and/or its affiliated companies in the United States and/or other countries. Because we are continuously improving our products and services, Pentair reserves the right to change specifications without prior notice. Pentair is an equal opportunity employer.

4/14 Part # P1-744 ©2014 Pentair Water Pool and Spa, Inc. All rights reserved.